

## **AERIAL**Collection

MODULAR CARPET TILES







## SPEC IFICATION

Style Name	AERIAL SERIES
Construction	Level loop
Fiber System	100% Advanced PP
Gauge	1/10"
Pile Weight	550g/m2
Pile Height	4mm/4.5mm±0.5mm
Backing	Eco-Backing (Environment Friendly)
Modular Tile Size	50cm*50cm
Packing	24 Pcs/Carton




A-100









Infinity Carpet tiles are manufactured with high quality raw material & modern technique. Our professional design team is well-versed in quality carpeting products and materials which has the best designs of carpets that matches for your needs and lifestyle. Infinity Carpet tile offers you extensive possibilities in flooring for choice and design with its Quality durable carpets. It has successfully combined innovation and skill to produce a diverse range of Commercial Carpet Tile product offerings for all market segments. Infinity Modular Carpets are suitable for use across all segments of the commercial market including:

- Education Healthcare Office
- Banks

- Universities
   Retail
- Hospitality
   Public Space
- Multi-Residential Apartments

## **CARE & MAINTENANCE**

The beauty and life of your carpet depend on the care it receives. Proper cleaning will keep your carpet looking great for its full lifetime, help improve your indoor air quality also.

- A good vacuuming program is essential to successful carpet maintenance as it reduces the frequency of periodic maintenance procedures required to maintain clean carpet.
- It is very important that the carpet tile is not over wet when using the deep cleansing process as this could cause irreparable damage to the carpet tile.
- A daily spot and stain removal process should also be implemented. Remove stains or spills immediately using clean warm water.
- It is also important that effective entrance barrier matting is installed at every exterior entrance. Avoid excessive use of cleaning products. Regular maintenance will help to preserve the appearance and extend the life of the carpet.
- Spots must be removed soon as they are noticed. Cleaning of soiled areas when they begin to show is essential. This can be done by a wet extraction system.
- Remove as much of food spills as possible by scraping gently with a spoon or dull knife.

## RECOMMENDED INSTALLATION METHOD







Quarter Turned



Static Electricity

Permanent Lifetime Protection-less than 3.5kv.



Lodging-resistant

superior resilience of fiber, suitable for wheels.



Anti Rubbing and feet trample because of fiber's properties



Dimensional Stability

Warranted not to change in size by more than 0.5mm in normal use will nor dome or dish in normal use.



Colour Fastness to Rubbing According to GB/T3920-2008 standards it is ≥ Grade 4 for dry rubbing ≥Grade 3 for wet rubbing.



Superior Sound insulation effect



Anti-soil Treatment Soil resistance treatment.



Wear Warranty

Product is warranted not to lose more than 15% pole fiber by weight in normal commercial use within 15 years.



Installation


Tackifier or releasable Adhesive Recommended.




Sustainability


All yarns used are Solution dyed to minimize use water And exclude any effluent production.


ISO14001 and ISO9001.

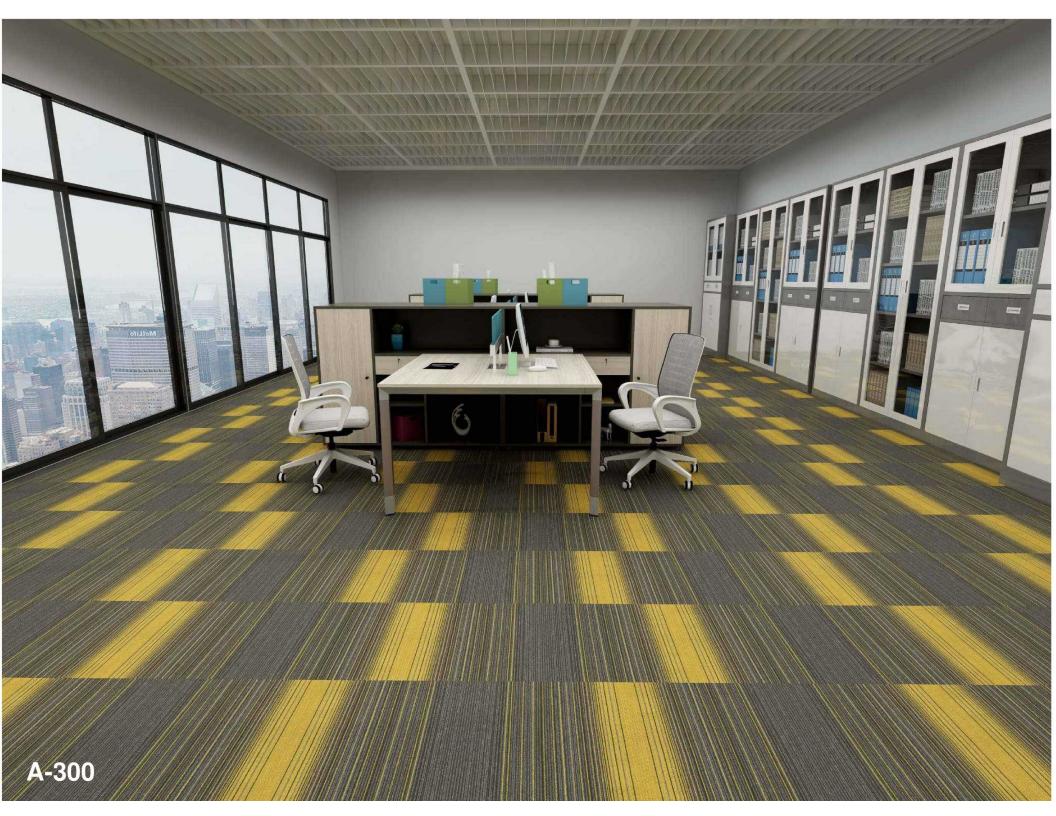


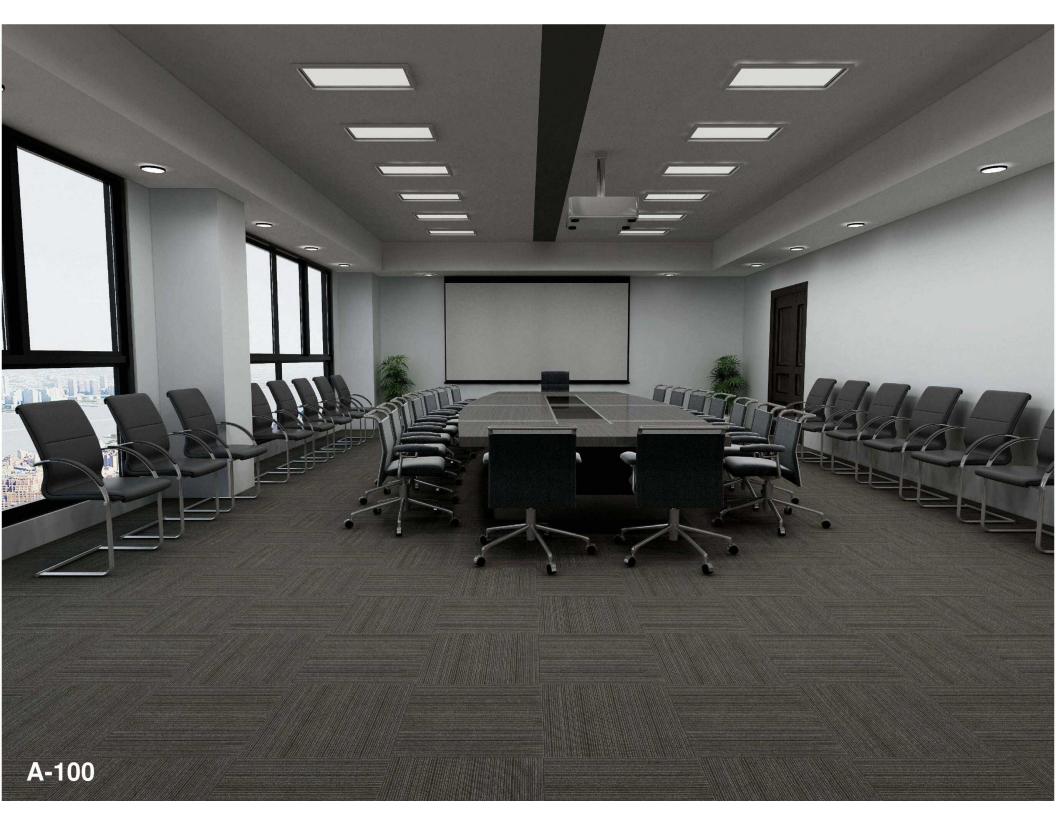



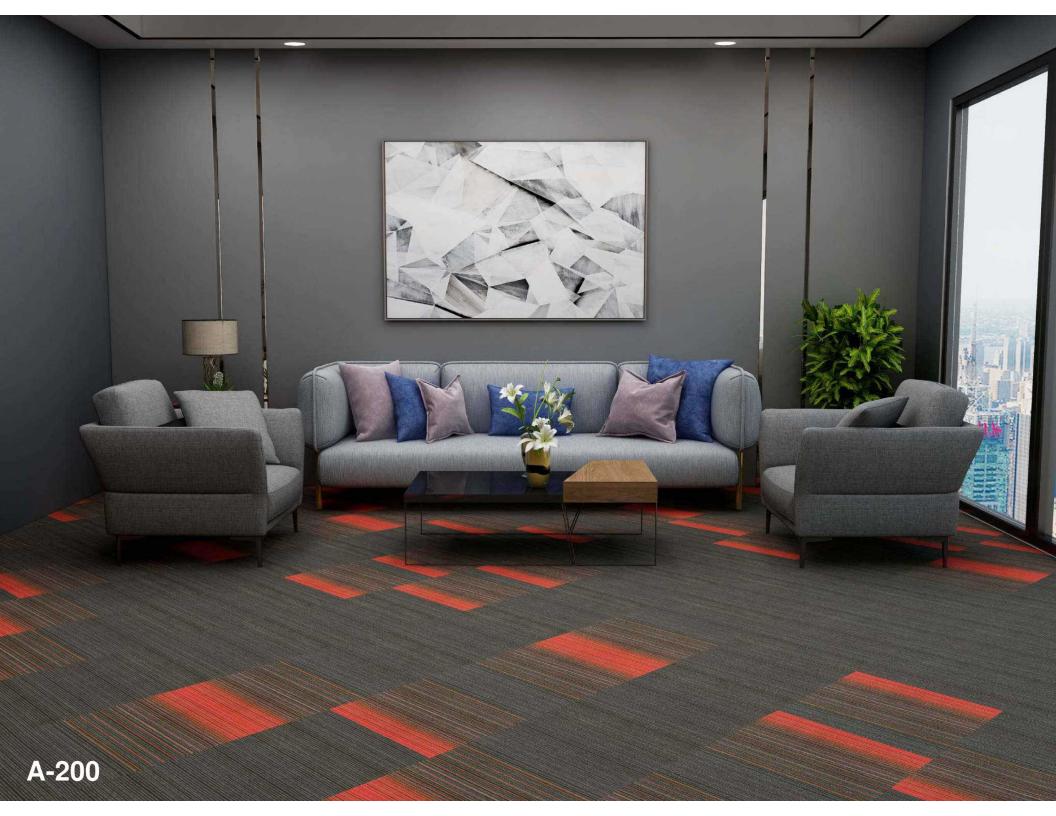

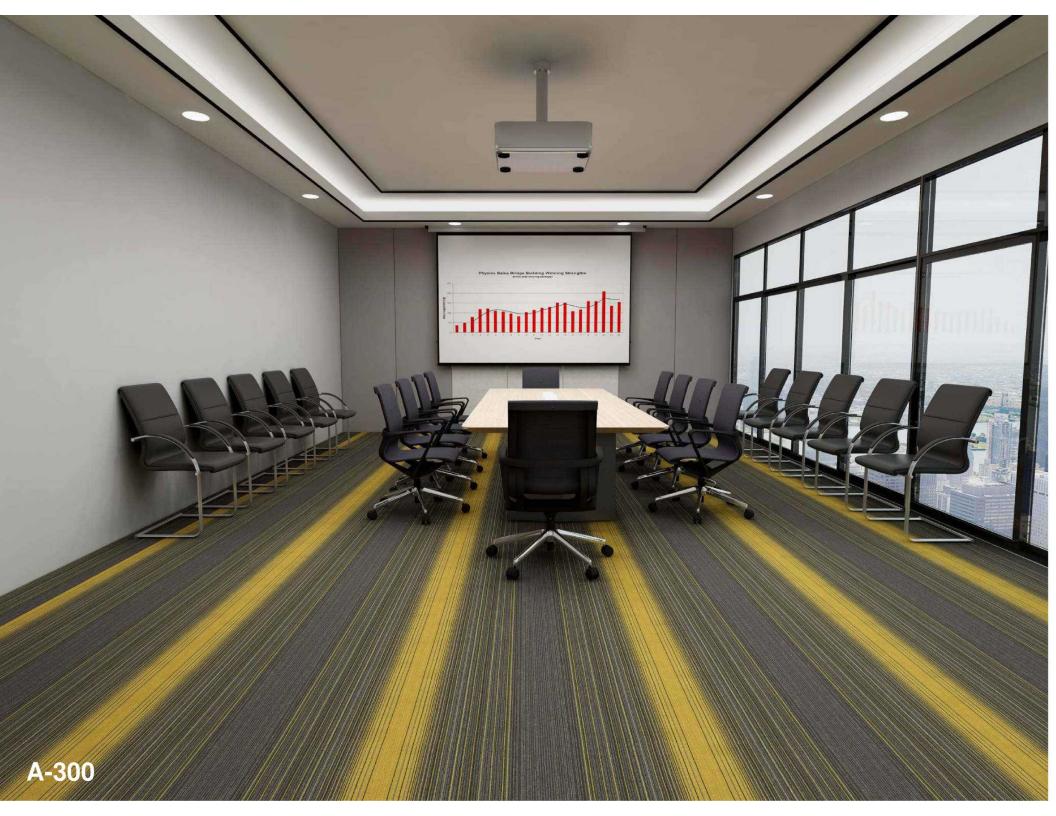

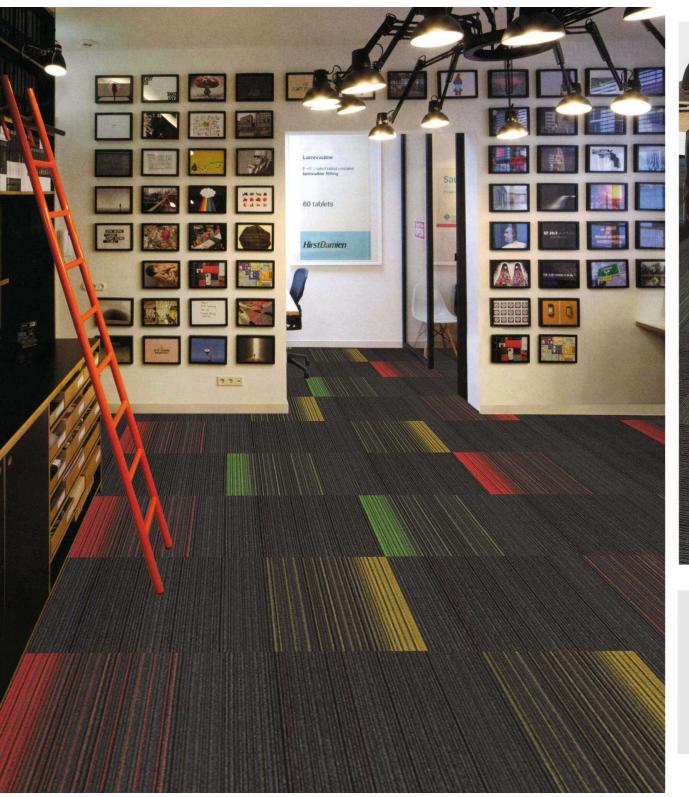




THE BEST DESIGN PROJECTS

ARE THE ONES WHERE

PEOPLE BROKE THE RULES



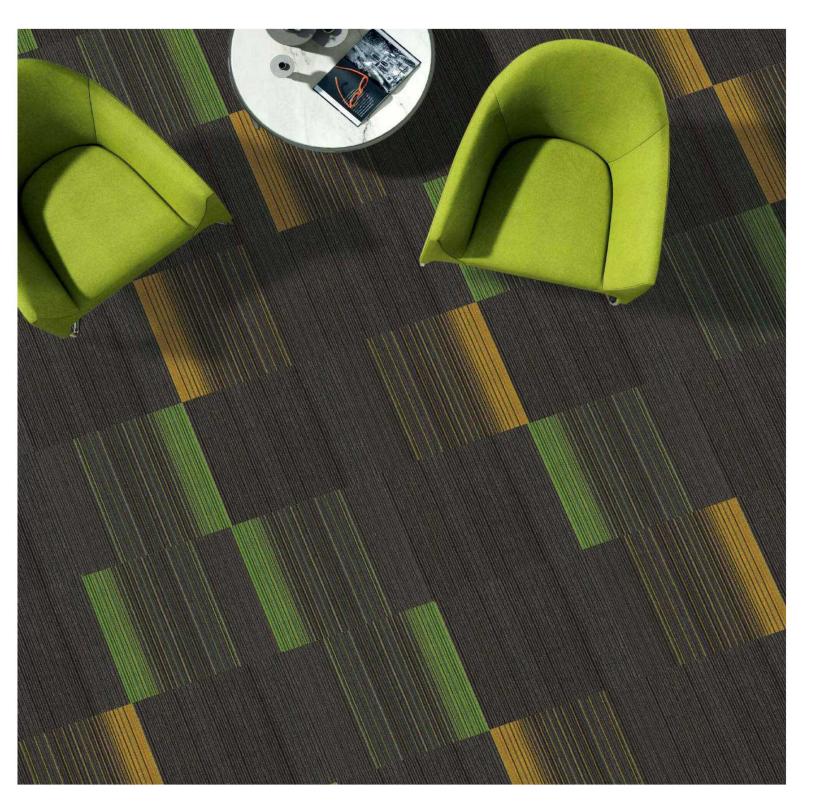




A-100



A-300



A-500

