

WONDERFLOOR
Vinyl Flooring

www.wonderfloor.co.in


Braavo

PRIME
SERIES

PRIME
SERIES

PUR

Protection

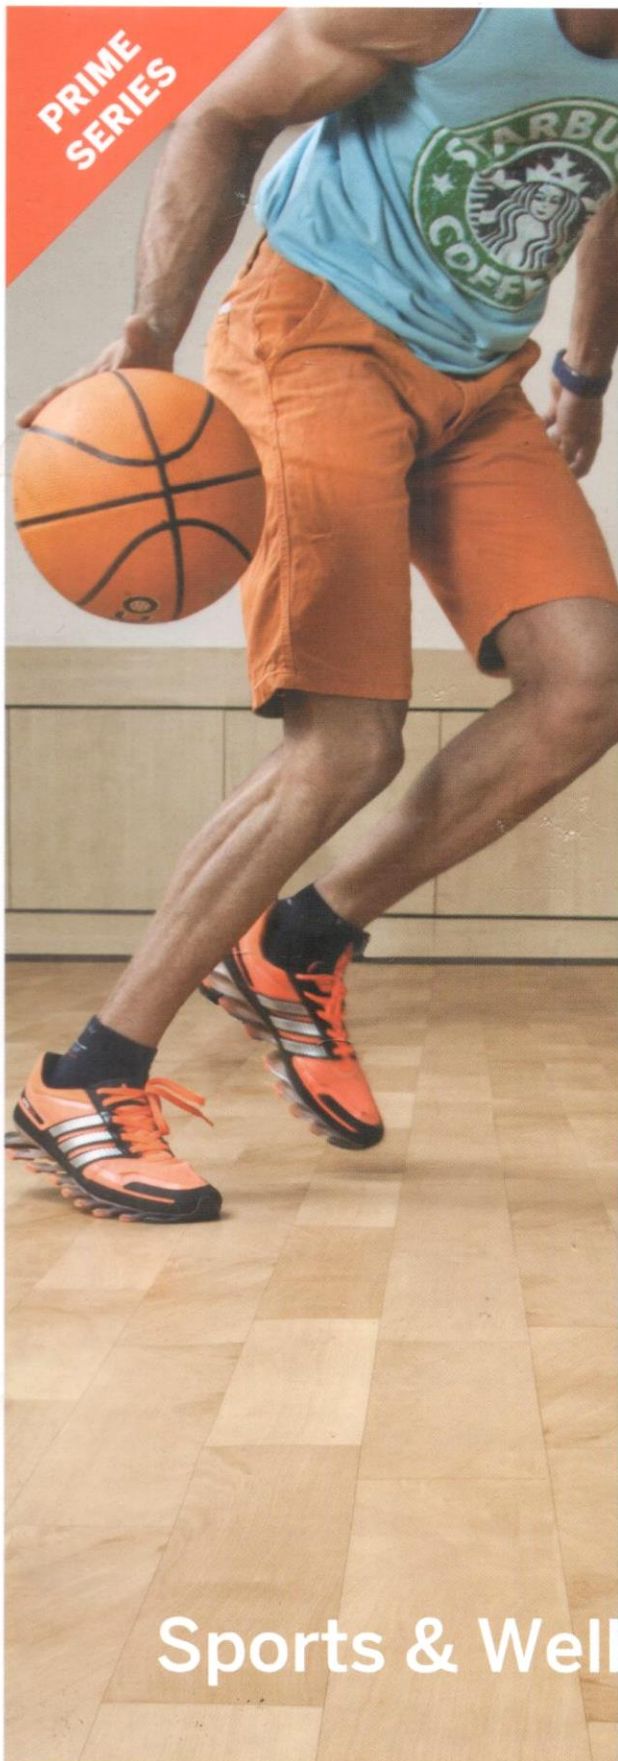

Sports & Wellness Flooring

Braavo

WONDERFLOOR
Vinyl Flooring

WONDERFLOOR

Vinyl Flooring

Braavo

4.50MM



(AR-051)

AR 051



(AR-053)

AR 053



(AR-054)

AR 054



(AR-055)

AR 055




(AR-056)

AR 056



(AR-057)

AR 057

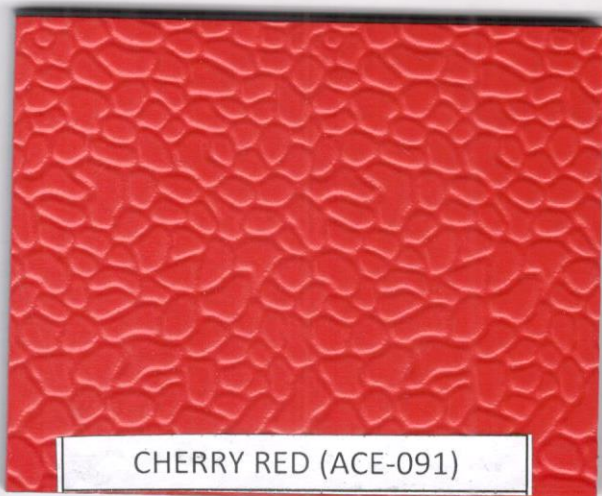

Ace. 091, Cherry Red



Ace. 092, Blue



Ace. 093, Orange



Ace. 094, Green



Ace. 095, Neo Silver



ACE. 096, Yellow


ACE. 097, Iron Grey

WONDERFLOOR
Vinyl Flooring

Braavo
Sports
4.5MM



SPT 081, Capri Blue

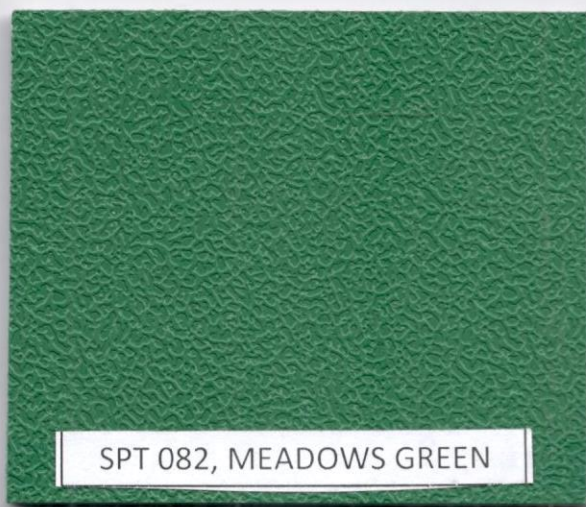

SPT 082, Meadows Green



Salient Features

- Glass Fiber Tissue (GFT) reinforced for dimensional stability and strength
- PUR surface protection
- Superior shock absorbing cushion base layer
- Specially formulated high abrasion resistant wear layer
- Application areas: sports courts, fitness centres, schools, yoga centers, hospitality, etc.
- Tough and sturdy to withstand heavy traffic and soft enough for a comfortable and jerk free workout

www.wonderfloor.co.in

Braavo


Braavo multiple layers for multiple benefits



WONDERFLOOR

Vinyl Flooring

Braavo
Elite
6.50MM

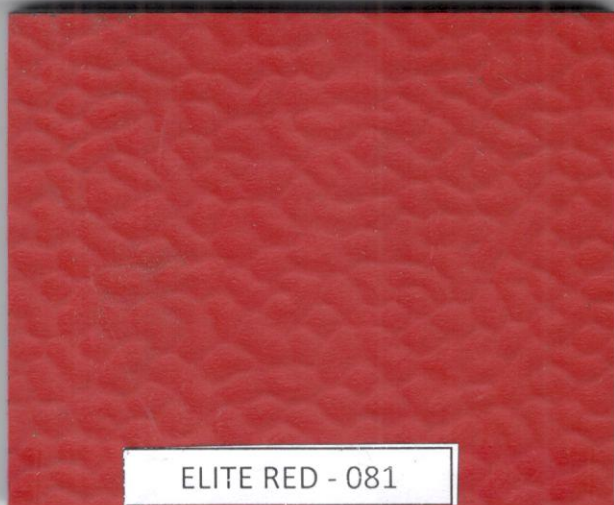

ELITE RED - 081



ELITE BLUE - 082



ELITE ORANGE - 083


ELITE GREY - 087



ELITE GREEN - 084



ELITE WOOD - 085A

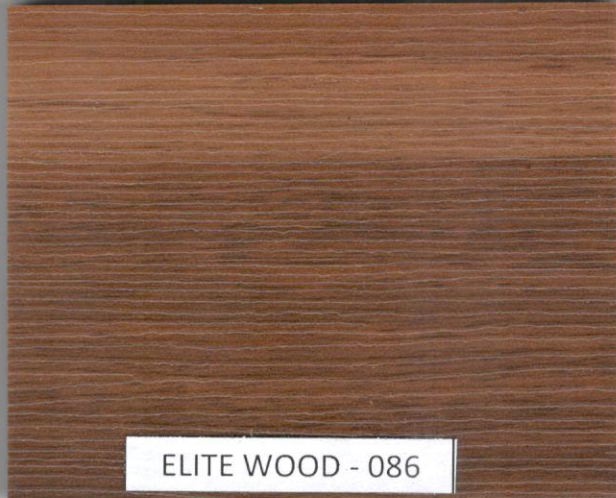


ELITE WOOD - 086

WONDERFLOOR - the world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Braavo is a premium cushioned sports and wellness flooring designed for modern day requirement of a floor that is heavy duty but soft enough for a comfortable and jerk free workout in a gym, sports court or a fitness centre. The high strength wear layer takes care of the heavy loads, the 'impregnated Glass Fibre Tissue' reinforcement provides a very high dimensional stability and lay flat properties to the product in any weather conditions. The densely compact cushioned base layer absorbs the jerks and also adds to the acoustical property of the floor.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	SYMBOLS	TEST METHOD	RESULTS 4.50 MM	RESULTS 6.50 MM
THICKNESS		EN 426	4.50 MM	6.50 MM
ROLL DEMENSION		EN 426	2 mtr x 15 linear mtr	2 mtr X 15 linear mtr
TOTAL WEIGHT		EN 430	3.3 KG/SQ.	4.3 KG/SQ
THICKNESS OF WEAR LAYER		EN 429	0.50 MM	1.00 MM*
DIMENSIONAL STABILITY		EN 434	≤0.10%	<0.10%
RESIDUAL INDENTATION AFTER STATIC LOAD		EN 433	≤0.40 MM	< 0.40 MM
FLEXIBILITY		EN 435	20 MM MANDREL, PASSED	20 MM MANDREL PASSED
ABRASION RESISTANCE		EN 660-2 EN 649	WEAR GROUP T	WEAR GROUP T
HORIZONTAL & VERTICAL BURNING TEST		IS 15061-2002	PASS (ARAI)	PASS (ARAI)
FIRE PROPAGATION		BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS "O",	(I) = 10.8 (II) = 1.7 } CLASS "O",
HYGIENE			TEST RESULT DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES	TEST RESULT DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES
COLOUR FASTNESS TO DAY LIGHT		ISO 105-BO2	>BLUE WOOL STANDARD 5	>BLUE WOOL STANDARD 5
SLIP RESISTANCE		DIN 51130	R 9	R 9
BEARING A CASTOR CHAIR		EN 425	SUITABLE/CONTINUOUS USE	SUITABLES/CONTINUOUS USE
RESISTANCE TO CHEMICALS		EN 423	NO VISIBLE CHANGE	NO VISIBLE CHANGE
SOUND ABSORPTION		ISO 140-8 EN ISO 717-2	Δ LW = 18db	Δ LW = 24db
PERFORMANCE CLASSIFICATION		EN 685	33, 34	33, 34
SURFACE PROTECTION			PUR	PUR

RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18° C and 27° C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic-based adhesive of similar type.

MAINTENANCE


Do's: • The surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com

or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885



RMG POLYVINYL INDIA LIMITED

Registered Office : UGSR 4, Ansals Plaza, Sector 1, Vaishali, Ghaziabad 201 010, (U.P) INDIA

Tel.: +91 120-4284802/803/804/805/806, Fax: +91 11 66173679. E-mail: info@rmgpoly.com

Regional Offices : • Ahmedabad: +91 9377262959 • Bangalore: +91 8088083037 • Bhubaneswar: +91 9582624009

• Chandigarh: +91 9023363357 • Chennai: +91 9380353335 • Guwahati: +91 9999014098

• Hyderabad: +91 9953724744 • Indore: +91 7838590904 • Kolkata: +91 9582538009

• Kochi: +91 8893191421 • Lucknow: +91 9026708007 • Mumbai: +91 9323675979

• Patna: +91 8252110100 • Pune: +91 9595191421 • Raipur: +91 9582431919

www.wonderfloor.com WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

