




**FLOOR
MASTER**


MESA CARPET PLANK



MESA RED

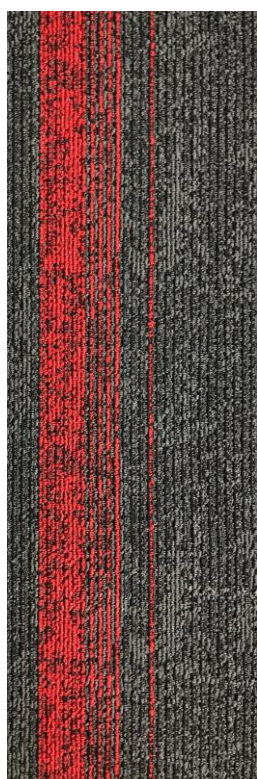

C

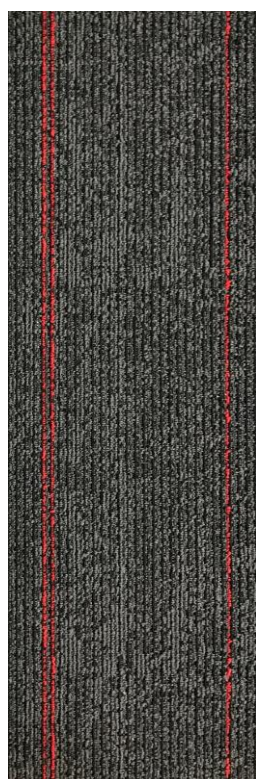


B



A



MESA GREEN

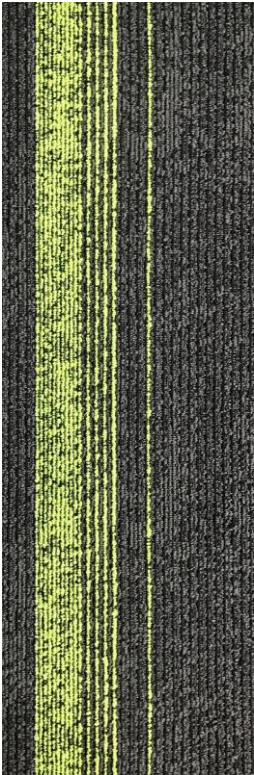

C




B




A



MESA BLUE

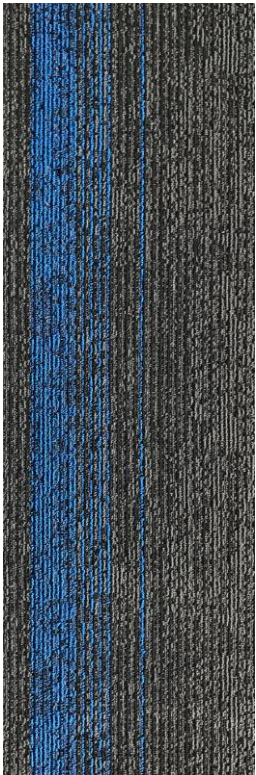

C

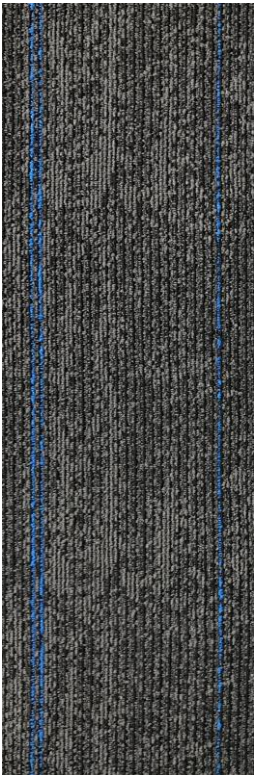


B




A




MESA BLUE
LIGHT GREY

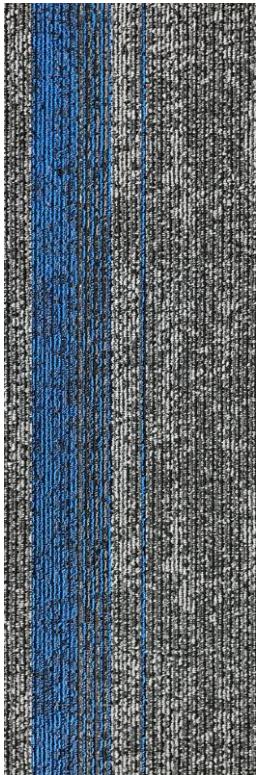

C

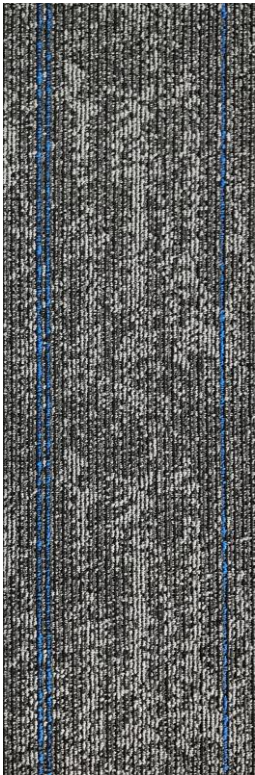

B





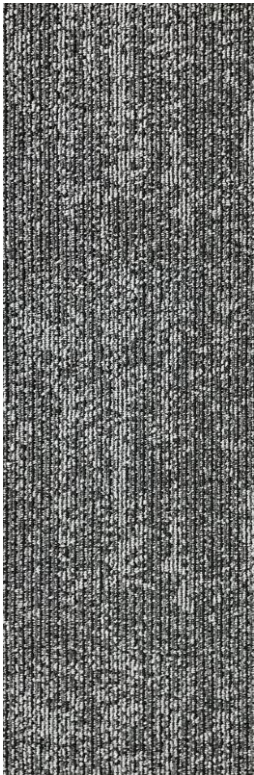


A

SPECIFICATIONS

Product	MESA
Construction	Modulated LOOP PILE
Yarn	Polypropylene B.C.F. UV Treated
Gauge	1/12
Pile weight	800 GSM
Pile Height	4 mm - 6 mm
Primary Backing	Non Woven
Secondary Backing	Modified Bitumen E-BACK
Tile Size	25 CM x 100 CM
Area of Use	Heavy Commercial
Smoke Densty Test (NIST)	ASTME 662-06
Fire Class	ASTMD 2859/CPSC FF 1-70 Flammability Test ASTMR 648 Radiant Panel Test
Static Control	AATCC - 175 Stain Resistance

INSTALLATION INSTRUCTION





PP Carpet Tile


Downtown M14



Specifications

Product	M-14 DOWNTOWN	HIGH STREET
CONSTRUCTION	MULTI-LEVEL LOOP	LEVEL LOOP
YARN	P.P.B.C.F. UV TREATED	P.P.B.C.F. UV TREATED
GUAGE	1/12	1/10
PILE WEIGHT	650 GSM	800 GSM
PILE HEIGHT	4 MM - 8 MM	5 MM
PRIMARY BACKING	NON WOVEN	NON WOVEN
SECONDARY BACKING	MODIFIED BITUMEN E-BACK	MODIFIED BITUMEN E-BACK
TILE SIZE	50 CM X 50 CM	50 CM X 50 CM
AREA OF USE	HEAVY COMMERCIAL	HEAVY COMMERCIAL
SMOKE DENSITY TEST (NIST)	ASTME 882-08	ASTME 882-08
FIRE CLASS	ASTMD 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM E 848 RADIANT PANEL TEST	ASTMD 2858 / CPSC FF 170 FLAMMABILITY TEST ASTM E 848 RADIANT PANEL TEST
Static Control	AATCC - 175 STAIN RESISTANCE	AATCC - 175 STAIN RESISTANCE

Installation Instruction

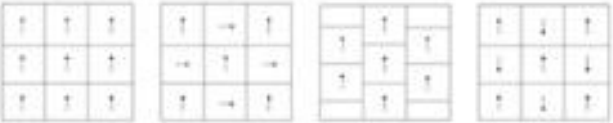



M14 - 11920



M14 - 11921



M14 - 11922




M14 - 11923




M14 - 11960



M14 - 11970



M14 - 11971



M14 - 11980

SPECIFICATION

Construction : Modulated Loop Pile

Yarn Type : Nylon

Gauge : 1/12


Pile Weight : 650 gsm

Pile Height : 4-6 mm.


Primary Backing : Non-Woven

Secondary Backing : E- Backing


Size : 50 X 50 cm

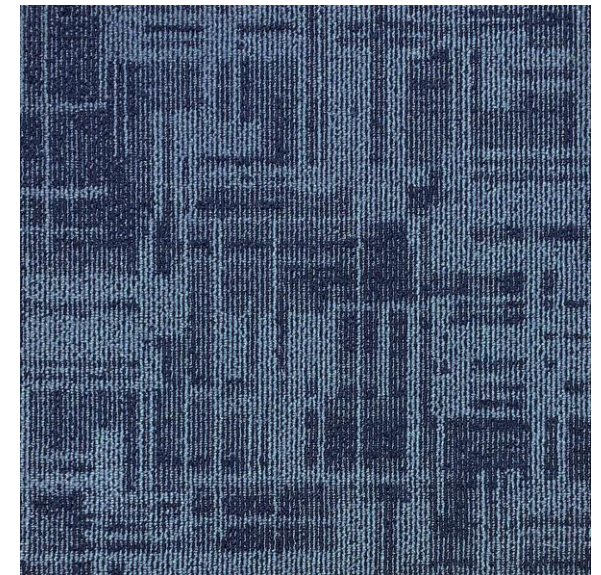

M14 - 11921

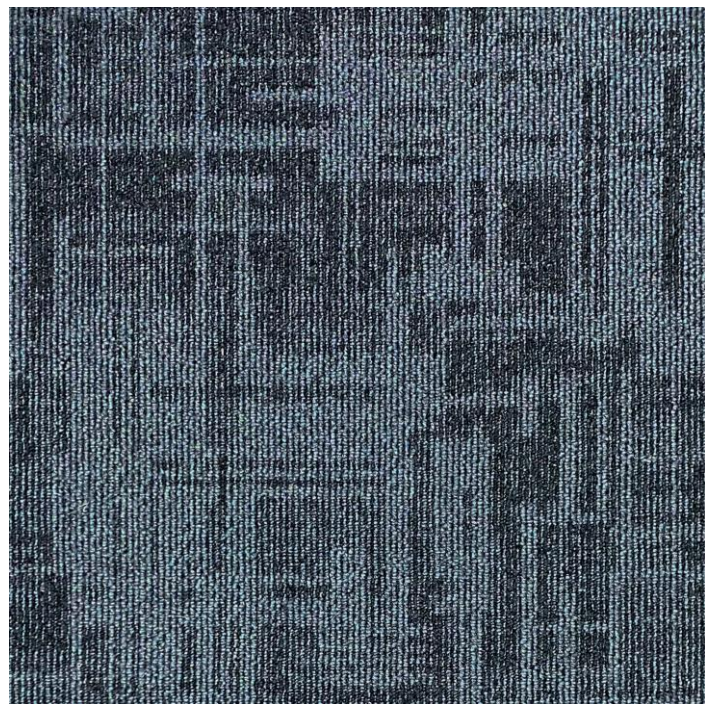

M14 - 11923

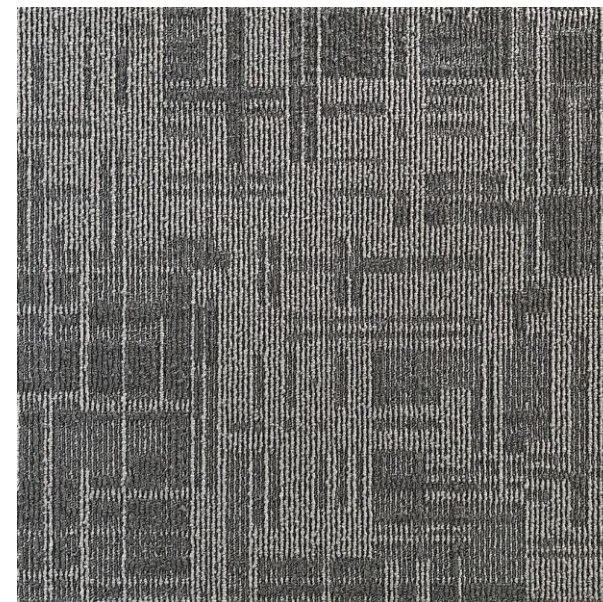

M14 - 11970



High Street Series

Specifications

Product

M-14 DOWNTOWN

HIGH STREET

CONSTRUCTION

MULTI-LEVEL LOOP

LEVEL LOOP

YARN

P.P.B.C.F. UV TREATED

P.P.B.C.F. UV TREATED

GALGE

1/12

1/10

PILE WEIGHT

650 GSM

600 GSM

PILE HEIGHT

4 MM - 6 MM

5 MM

PRIMARY BACKING

NON WOVEN

NON WOVEN

SECONDARY BACKING

MODIFIED BITUMEN E-BACK

MODIFIED BITUMEN E-BACK

TILE SIZE

50 CM X 50 CM

50 CM X 50 CM

AREA OF USE

HEAVY COMMERCIAL

HEAVY COMMERCIAL

SMOKE DENSITY TEST (NBT)

ASTM E 882-06

ASTM E 882-06

FIRE CLASS

ASTM D 2858 / CPSC FF 170
FLAMMABILITY TEST ASTM E 848
RADIANT PANEL TEST


ASTM D 2858 / CPSC FF 170
FLAMMABILITY TEST ASTM E 848
RADIANT PANEL TEST

Static Control


AATCC - 175 STAIN RESISTANCE

AATCC - 175 STAIN RESISTANCE


Installation Instruction

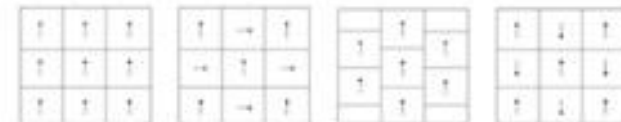

www.floormaster.com

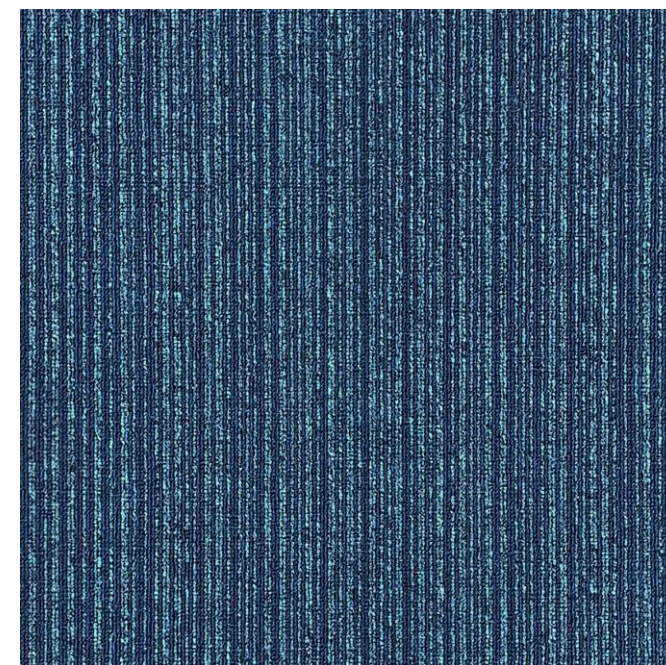

TL - 12720

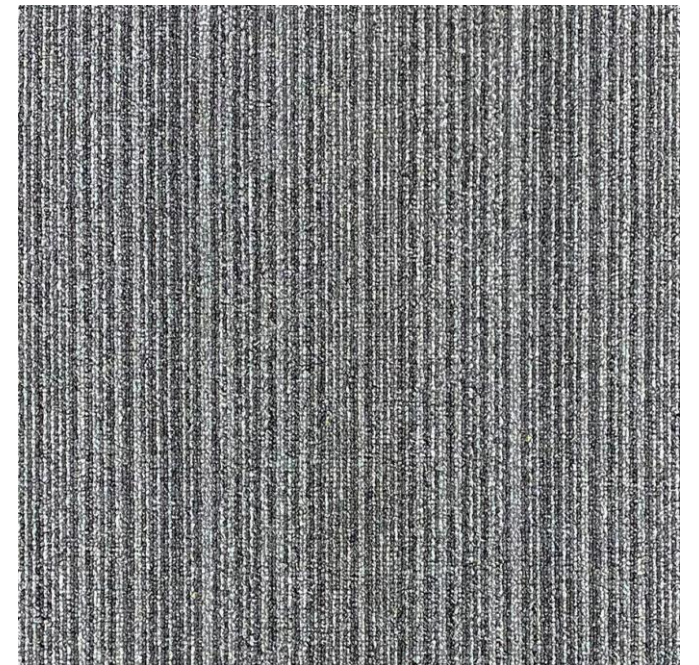

TL - 12771



TL - 12760