

WONDERFLOOR

www.wonderfloor.co.in

Stoneland Monza

**PRIME
SERIES**

PUR

**MADE
in
INDIA**

Luxury Vinyl Tiles

WONDERFLOOR
Vinyl Flooring

STN 01
THICKNESS - 2 MM


WONDERFLOOR
Vinyl Flooring

STN 02
THICKNESS - 2 MM



WONDERFLOOR
Vinyl Flooring

STN 03
THICKNESS - 2 MM

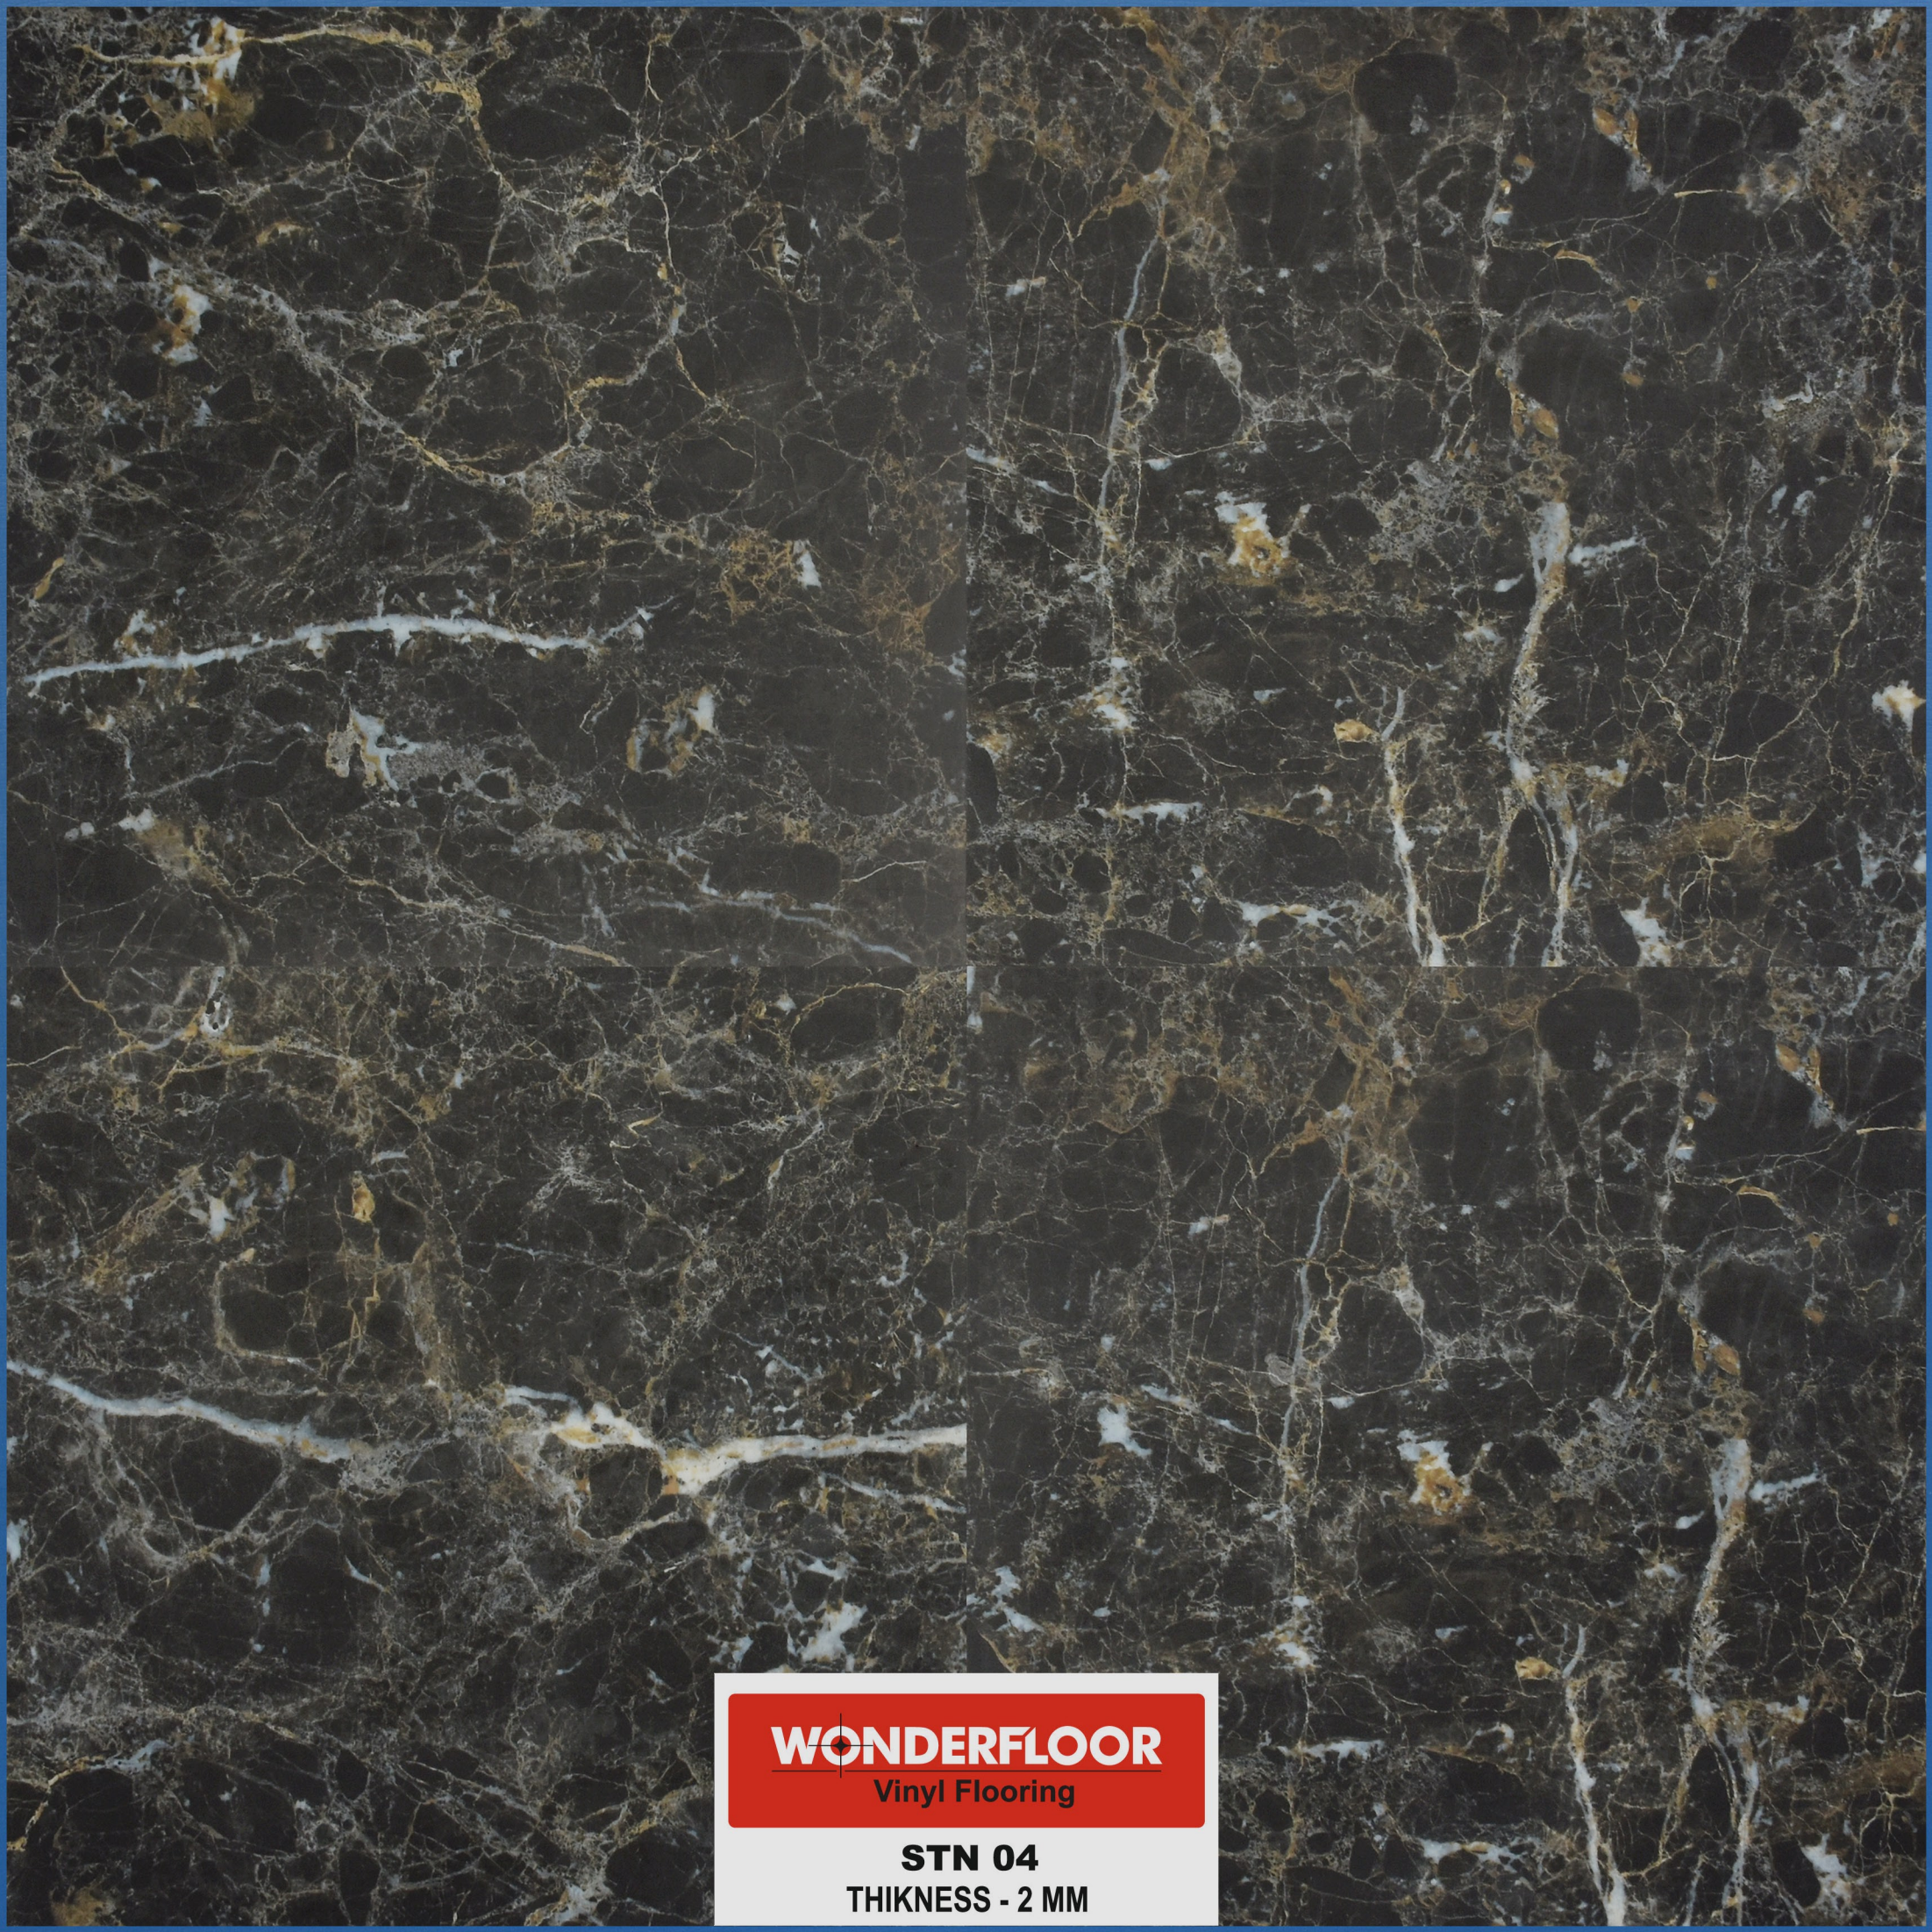

WONDERFLOOR
Vinyl Flooring


STN 04
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 05
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 06
THICKNESS - 2 MM

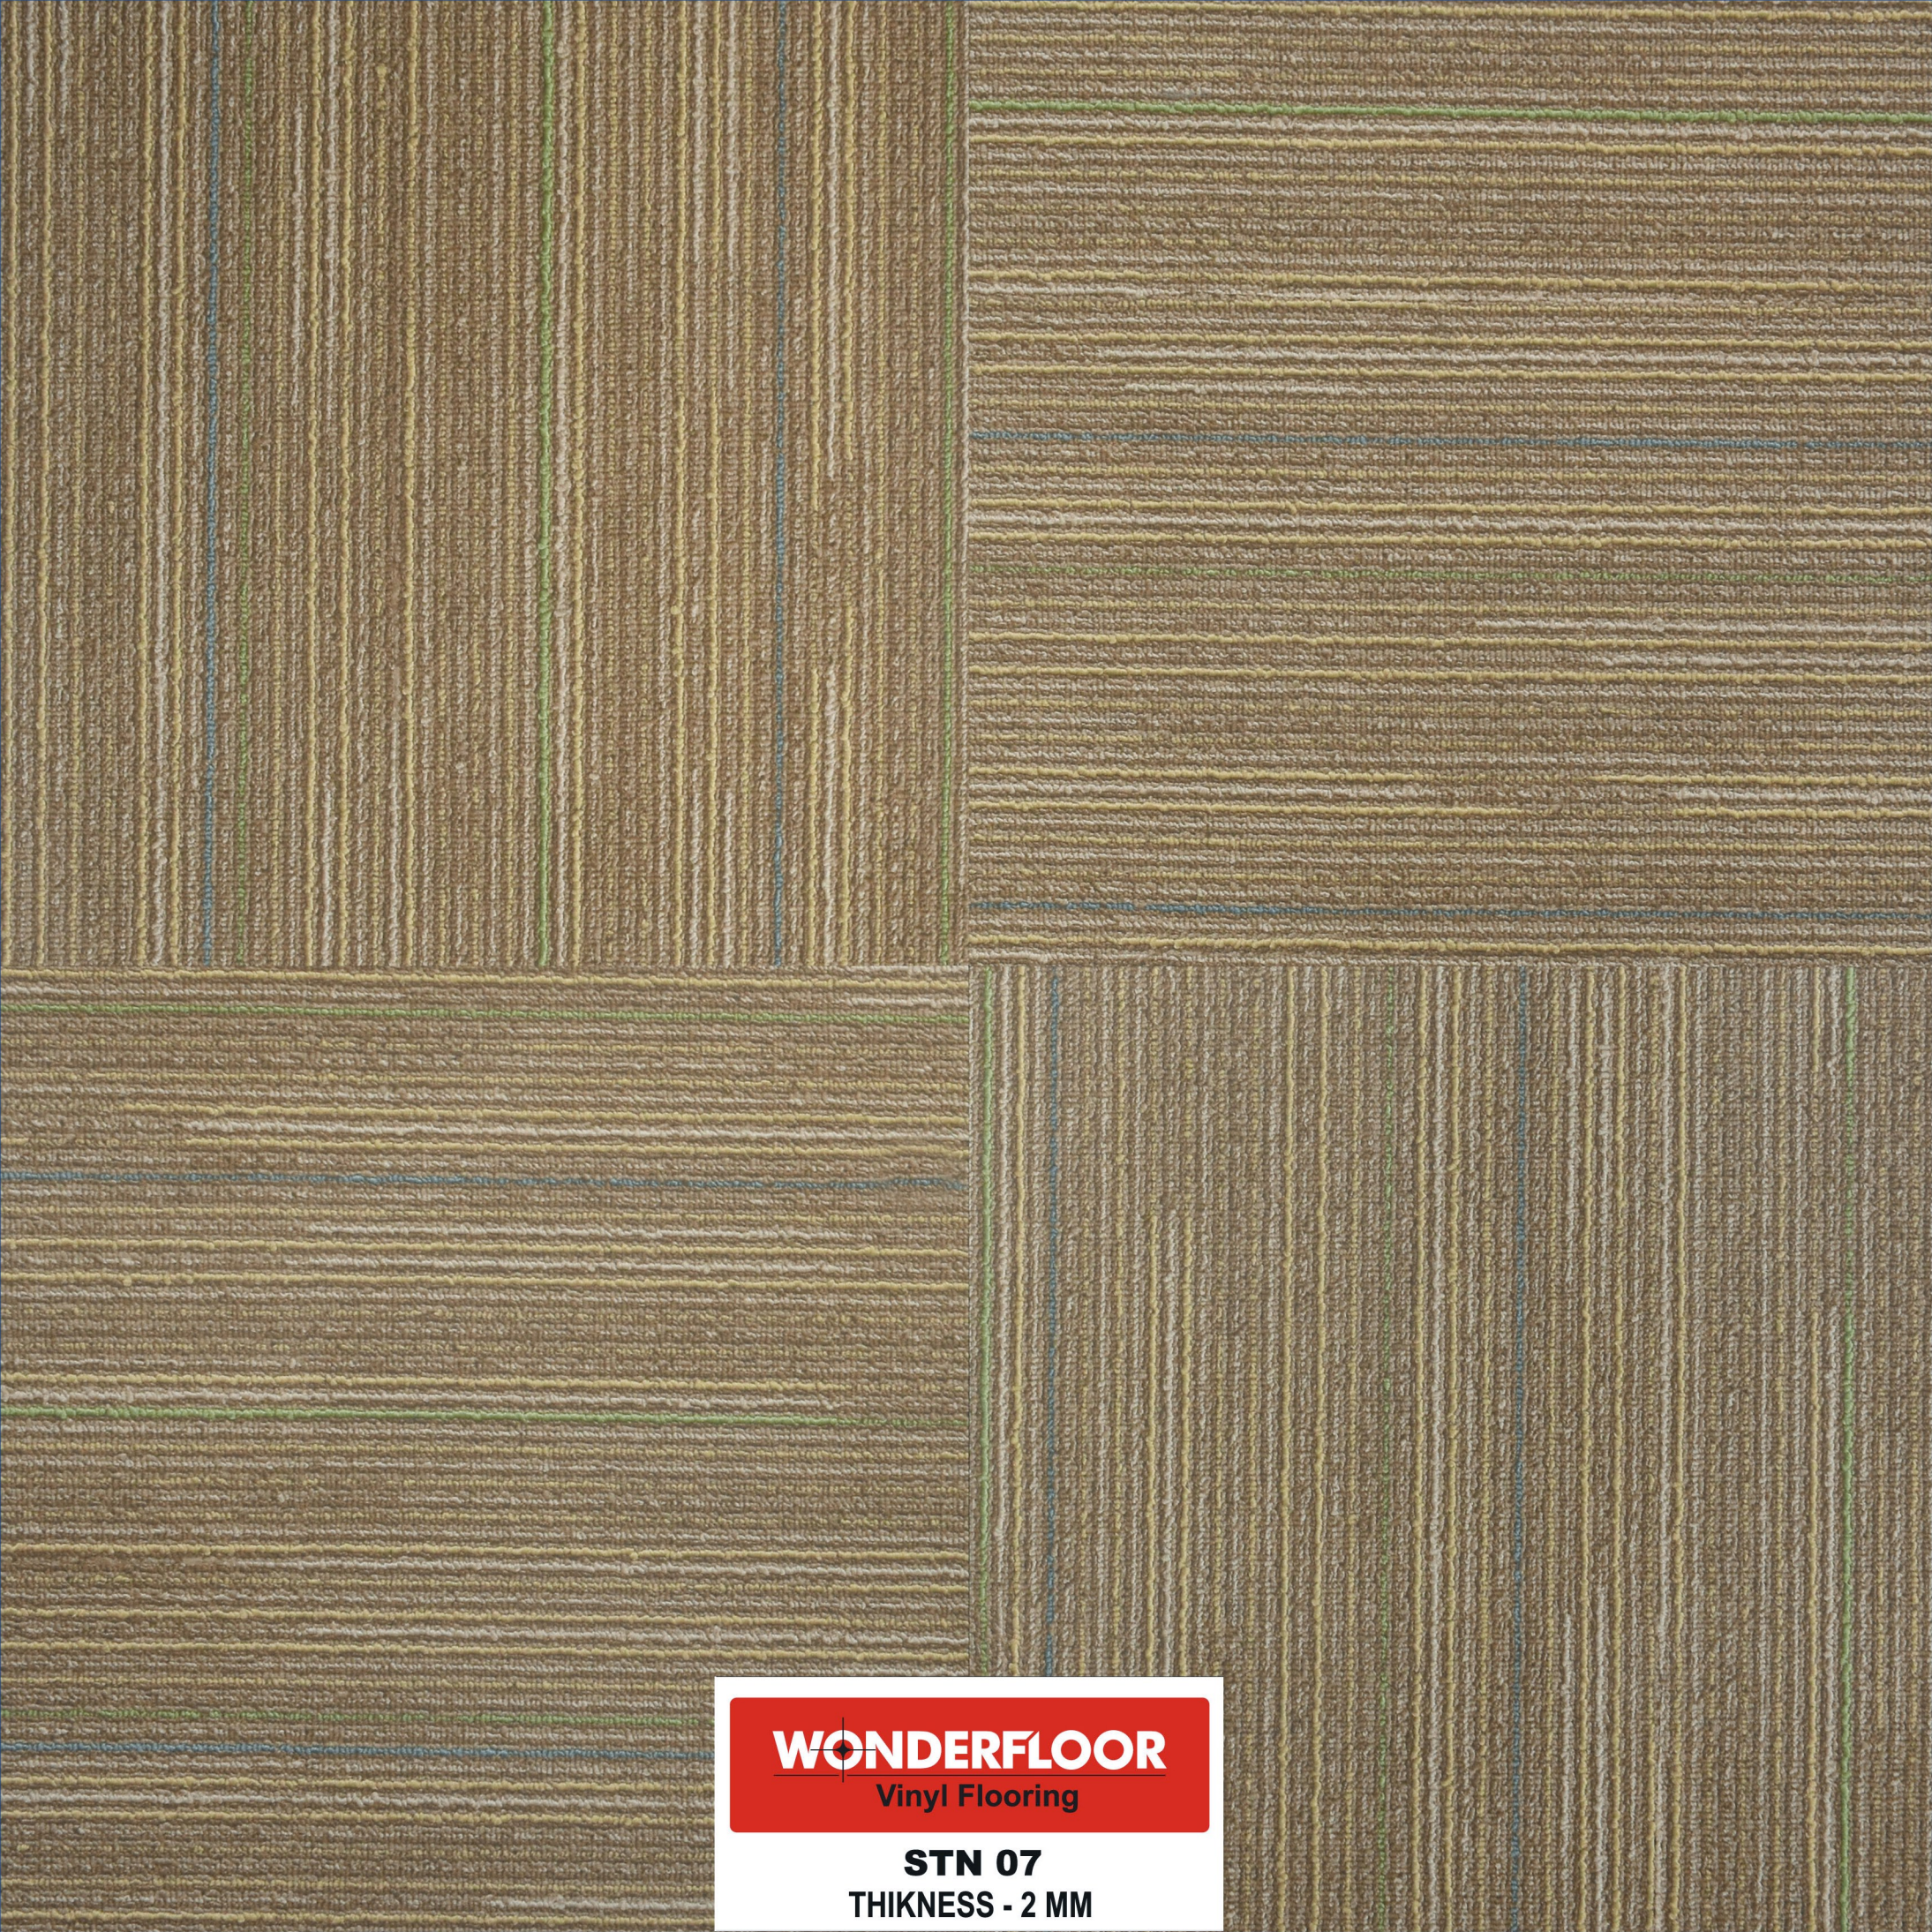

WONDERFLOOR
Vinyl Flooring

STN 07
THICKNESS - 2 MM



WONDERFLOOR
Vinyl Flooring

STN 08
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 09
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 10
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 11
THICKNESS - 2 MM

WONDERFLOOR
Vinyl Flooring

STN 12
THICKNESS - 2 MM

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

STONELAND MONZA are the latest collection of PVC stone tiles. The shades and designs are carefully chosen to complement the natural stone. Manufactured with multi-layer technology, this premium flooring is highly suitable to handle heavy footfalls. The PUR protection layer ensures trouble free performance and enhance durability. Stoneland Monza reduces noise impact, is trendy, quick to install, easy to use and maintenance free. Finally, these are termite resistant, moisture resistant & fire resistant. Stoneland Monza tiles are recommended for hotels, stores, malls, cafeteria, auditorium, schools, banks, offices etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	STONELAND MONZA
TYPE OF FLOORING	EN 649	RESILIENT FLOORING
THICKNESS (mm)	EN 428	2.0 mm*
DIMENSION (SIZE)	EN 427	457.2mm X 457.2mm (18" X 18")**
SQAURENESS	IS: 3464	≤ 0.25 mm
WEAR LAYER		0.20 mm (Heavy duty)
DENSITY	EN 430	3500g/m ²
DIMENSIONAL STABILITY	EN 434	≤ 0.25 mm
RESIDUAL INDENTATION	EN 433	≤ 0.10 mm
FLEXIBILITY	EN 435	NO CRACKING USING 20mm mandrel
COLOR FASTNESS	ISO 105	CLASS 6
FIRE RATING	EN 13501 - 1	Bfl-S1
HORIZONTAL & VERTICAL BURNING TEST	IS 15061 - 2002	PASS (ARAI)
PERFORMANCE CLASSIFICATION	EN 685	34/41
ABRASION RESISTANCE	EN 660-2	Wear Group P
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	ΔLW=5db
SLIP RESISTANCE	DIN 51130	R9
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS USE
SURFACE PROTECTION	PUR	PUR
MOISTURE MOVEMENT	APPENDIX B OF IS: 3462	≤ 0.40%
RESISTANCE TO STAINING	EN 423	PASS
PATTERN		STONE
PACKING DETAILS		20 pcs / box = 4.18 sqm / box (45 sq.ft)

*Thickness: 1.5 mm / 3.0 mm can be produced against bulk quantity orders

**Tile sizes: 300 mm x 300mm / 228 60 mm x 914 40 mm can be produced against bulk quantity orders

RECOMMENDATION FOR INSTALLATION

Stoneland Monza must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl tiles are suitable for laying on any surface such as concrete, steel, wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Wonderfloor premium flooring range are UV cured with PUR guard for resistance against stains and scratches in addition to minimising the maintenance cost. A light mop daily will keep floorings spick & span, if required. A door mat if placed at the entrance of the room will ensure that dust particles remain out which will further enhance the aesthetic look and ensure a long service life of the flooring.

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com or call : +91 9711200510
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885 / +91 9953208740



RMG POLYVINYL INDIA LIMITED

Corporate Office : UGSR 4, Ansal Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA

Tel.: +91 120-4284802/803/804/805/806. Fax: +91 11 66173679

E-mail: info@rmgpoly.com

Regional Offices : • Ahmedabad: 9377262959 • Bangalore: 8088083037 • Bhubaneswar: 9582624009 • Chandigarh: 9023363357 • Chennai: 9380353335 • Guwahati: 9999014098
• Hyderabad: 9953724744 • Indore: 7838590904 • Kolkata: 9582538009 • Kochi: 8893191421 • Lucknow: 9026708007 • Mumbai: 9323675979 • Patna: 8252110100
• Pune: 9595191421 • Raipur: 9582431919

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

